



Please write clearly in block capitals.

Centre number

--	--	--	--	--

Candidate number

--	--	--	--

Surname

---

Forename(s)

---

Candidate signature

---

I declare this is my own work.

# A-level PHYSICS

## Paper 3 Section A

Thursday 15 June 2023

Morning

Time allowed: The total time for both sections of this paper is 2 hours. You are advised to spend approximately 70 minutes on this section.

### Materials

For this paper you must have:

- a pencil and a ruler
- a scientific calculator
- a Data and Formulae Booklet
- a protractor.

### Instructions

- Use black ink or black ball-point pen.
- Fill in the boxes at the top of this page.
- Answer **all** questions.
- You must answer the questions in the spaces provided. Do not write outside the box around each page or on blank pages.
- If you need extra space for your answer(s), use the lined pages at the end of this book. Write the question number against your answer(s).
- Do all rough work in this book. Cross through any work you do not want to be marked.
- Show all your working.

### Information

- The marks for questions are shown in brackets.
- The maximum mark for this paper is 45.
- You are expected to use a scientific calculator where appropriate.
- A Data and Formulae Booklet is provided as a loose insert.

For Examiner's Use	
Question	Mark
1	
2	
3	
<b>TOTAL</b>	



J U N 2 3 7 4 0 8 3 A 0 1

1B/M/Jun23/E10

**7408/3A**

## Section A

Answer **all** questions in this section.

Do not write  
outside the  
box

0 1

A stroboscope emits bright flashes of white light.  
The duration of each flash and the frequency of the flashes can be varied.

**Table 1** shows information about the stroboscope.

Table 1

	Minimum	Maximum
Duration of each flash / $\mu\text{s}$	60	300
Frequency of flashes / Hz	1	150

The duration of each flash is  $T_1$ .

The time from the start of a flash to the start of the next flash is  $T_2$ .

The duty cycle of a stroboscope is defined as  $\frac{T_1}{T_2}$ .

0 1 . 1

What is the maximum duty cycle of the stroboscope?

Tick (✓) **one** box.

[1 mark]

$6.0 \times 10^{-5}$

$3.0 \times 10^{-4}$

$9.0 \times 10^{-3}$


$4.5 \times 10^{-2}$



0 1 . 2

**Figure 1** shows images produced in an experiment in which a bouncing ball is illuminated by a stroboscope. The stroboscope flashes at a constant frequency.

**Figure 1**

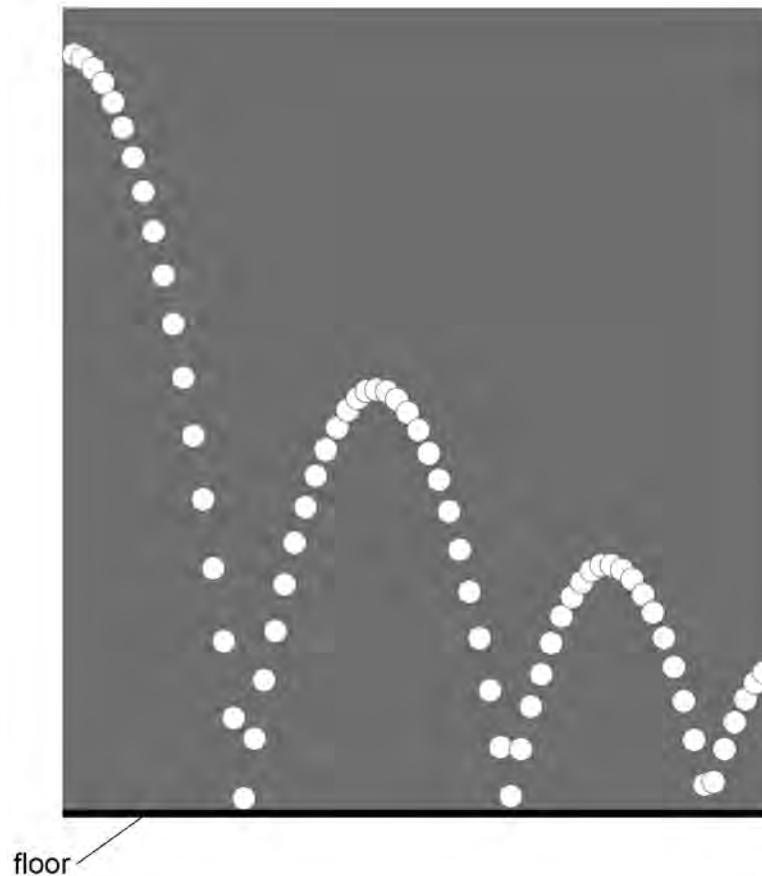

Suggest why  $T_1$  must be very short for this experiment.

[1 mark]

---

---

---

Question 1 continues on the next page


Turn over ►



Figure 2 shows the first six images starting with  $n = 0$ , where  $n$  is the image number.

Do not write  
outside the  
box

Figure 2

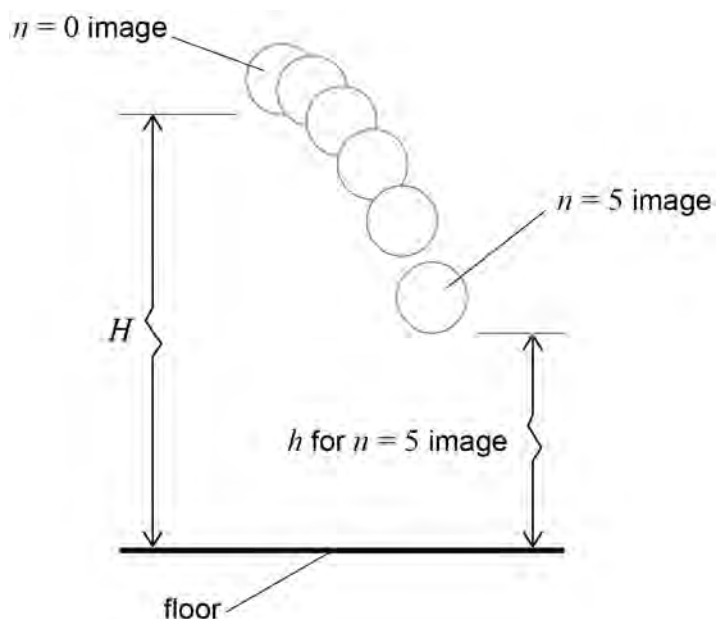

The images are used to determine:

$H$ , the vertical distance from the bottom of the ball to the floor when  $n = 0$

$h$ , the vertical distance from the bottom of the ball to the floor for each non-zero value of  $n$ .

The  $n = N$  image is produced at the instant that the ball hits the floor for the first time. For  $n$  between 0 and  $N$  it can be shown that

$$H - h = \frac{u_0 n}{f} + \frac{g}{2} \left( \frac{n}{f} \right)^2$$

where

$u_0$  is the vertical velocity of the ball when  $n = 0$

$g$  is the acceleration due to gravity

$f$  is the frequency of the flashes.



**0 1 . 3** In order to find  $g$ , a graph is plotted with values of  $\frac{H-h}{n}$  on the  $y$ -axis.

Suggest what is plotted on the  $x$ -axis.  
Go on to explain how  $g$  is determined from this graph.

**[3 marks]**

---



---



---



---



---



---

The following data are recorded.

$$H = 1550 \text{ mm}$$

$$f = 31.0 \text{ Hz}$$

The graphical analysis of data from **Figure 1** gives  $g$  as  $9.79 \text{ m s}^{-2}$ .

**0 1 . 4** Determine  $u_0$ .

**[3 marks]**

$$u_0 = \underline{\hspace{10em}} \text{ m s}^{-1}$$

**Question 1 continues on the next page**

**Turn over ►**




**Figure 3** shows positions of the bottom of the ball for  $n = 40$  to  $n = 66$

In this range of positions, the ball makes contact with the floor for the second and third times.

Values of  $h$ , the vertical distance from the bottom of the ball to the floor, are plotted on the  $y$ -axis.

Values of  $s$ , the horizontal displacement from a point on the floor below the centre of the  $n = 0$  image, are plotted on the  $x$ -axis.

**Figure 3**

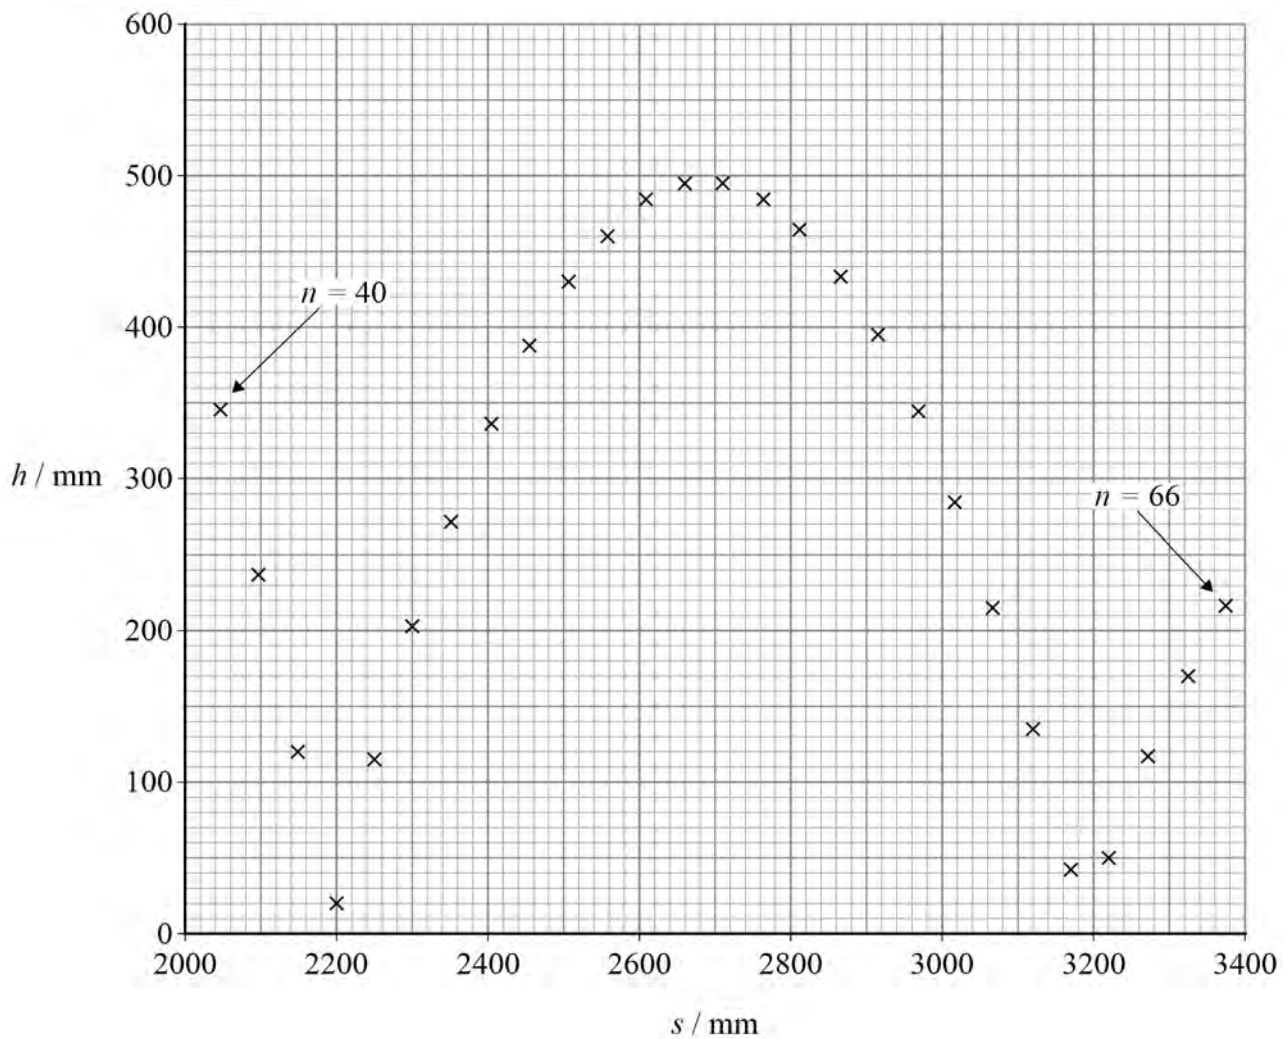

Do not write  
outside the  
box



Do not write  
outside the  
box

0 1 . 5

Determine, in  $\text{mm s}^{-1}$ , the horizontal velocity of the ball between the second and third contacts of the ball with the floor.

[2 marks]

horizontal velocity = \_\_\_\_\_  $\text{mm s}^{-1}$

0 1 . 6

Determine the time between the second and third contacts. Annotate **Figure 3** to show your method.

[3 marks]

time = \_\_\_\_\_ s

13

Turn over ►




0 2

Figure 4 is a plot of current–voltage data for a filament lamp L.

Do not write outside the box

Figure 4

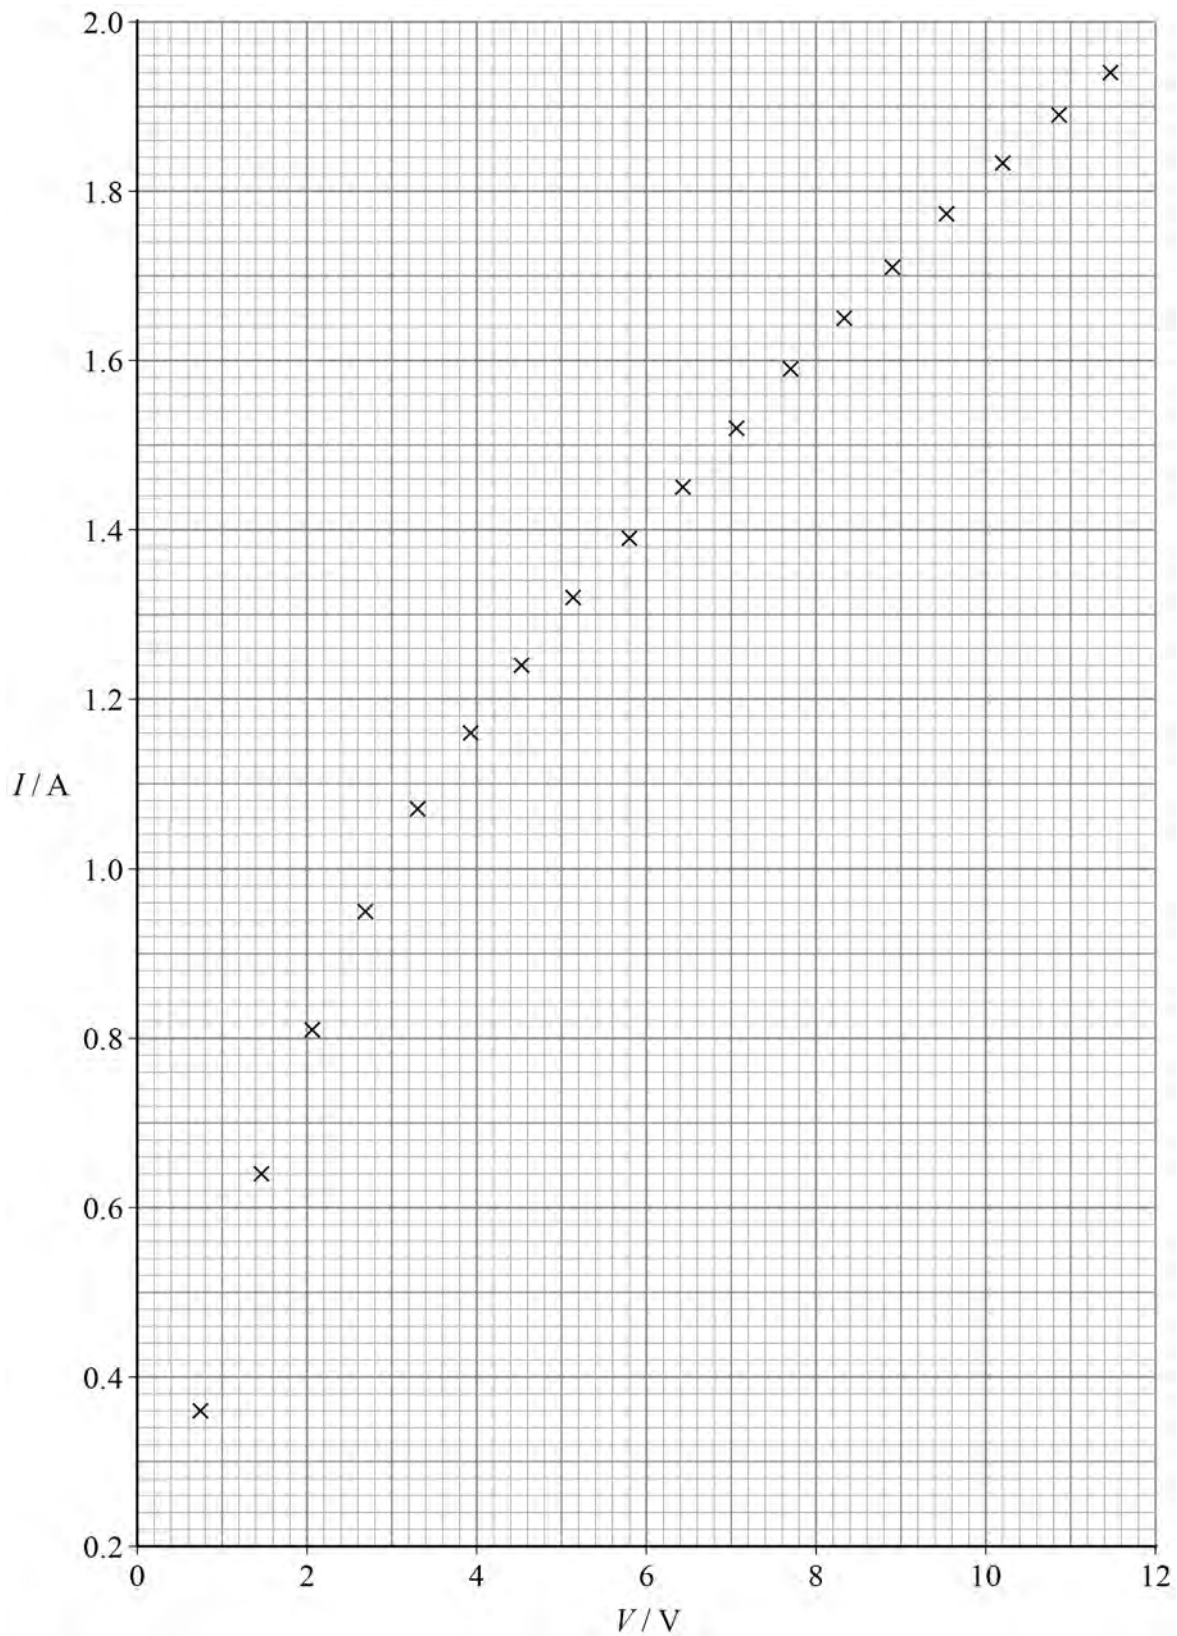



The current  $I$  was measured as the voltage  $V$  across  $L$  was increased at a steady rate.

These data were obtained using a current sensor and a voltage sensor connected to a data logger.

The logger recorded data at a rate of 2.5 Hz.

**0 2 . 1** Determine, in  $\text{V s}^{-1}$ , the rate of increase of  $V$ .

**[2 marks]**

rate of increase of  $V =$  \_\_\_\_\_  $\text{V s}^{-1}$

**0 2 . 2** State **two** advantages of using data logging for this experiment.

**[2 marks]**

1 \_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

2 \_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

**Question 2 continues on the next page**


**Turn over ►**



0 2 . 3 Figure 5 shows two circuits that can be used to collect current–voltage data.

Do not write  
outside the  
box

Figure 5

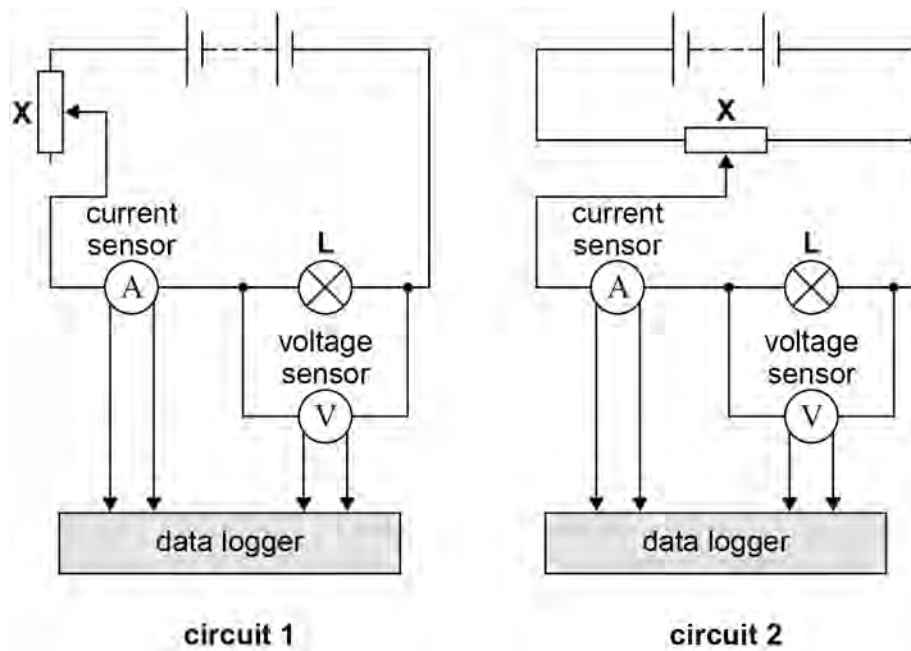

The dc supply has an emf of 12 V and negligible internal resistance. The current sensor and the voltage sensor behave as ideal meters.

In circuit 1:

- **X** is used as a variable resistor with a maximum resistance of  $14.9\ \Omega$
- when **X** is set to maximum resistance, the resistance of **L** is  $2.3\ \Omega$ .

In circuit 2, **X** is used as a potential divider.



*Do not write  
outside the  
box*

Discuss, with reference to circuit **1** and circuit **2**, whether either circuit can produce all the data shown in **Figure 4**.  
Support your answer with a calculation.

**[4 marks]**

---

---

---

---

---

---

---

---

---

---

**Question 2 continues on the next page**

**Turn over ►**



**Table 2** shows some values of  $V$  that are plotted on **Figure 4** and corresponding results for  $I$  and for the power  $P$  dissipated in  $L$ .

Do not write  
outside the  
box

**Table 2**

$V / \text{V}$	$I / \text{A}$	$P / \text{W}$
3.30	1.07	3.53
5.17	1.32	
7.69	1.59	12.2
9.58		
11.47	1.94	22.3

**0 2 . 4** Complete **Table 2**.


**[3 marks]**



0 2 . 5

Plot on **Figure 6** a graph of  $P$  against  $V$ .  
You should use only the data in your completed **Table 2**.

Do not write  
outside the  
box

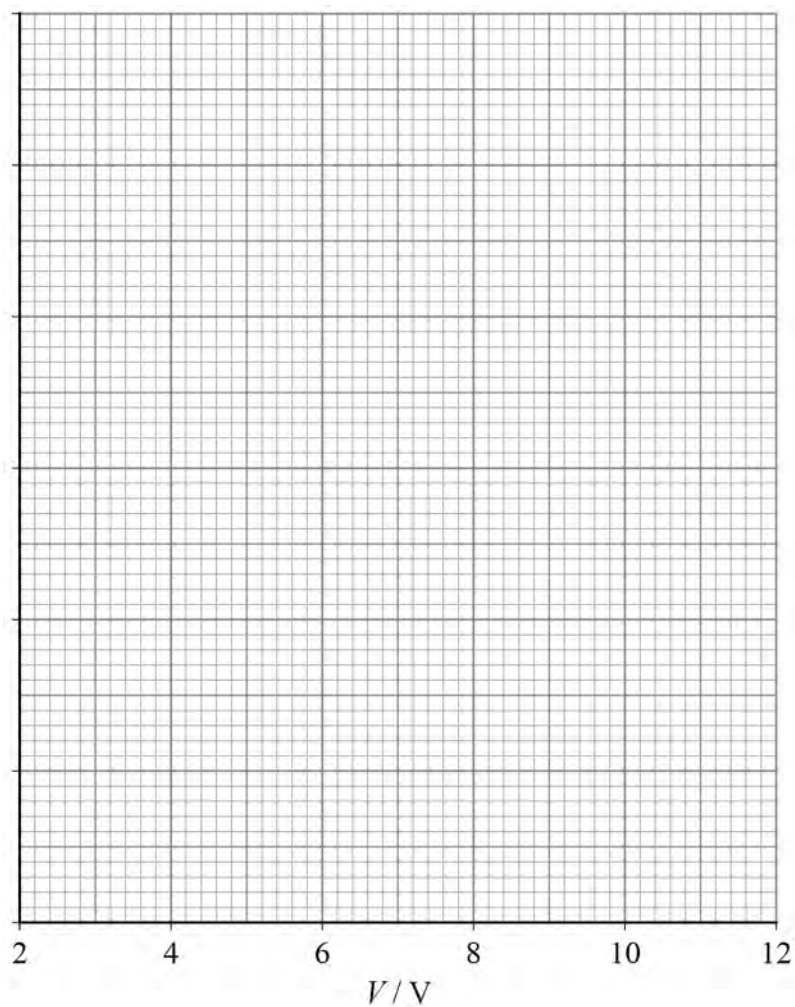**[3 marks]****Figure 6**

Question 2 continues on the next page

**Turn over ►**

Do not write  
outside the  
box

0 2 . 6

**L** is connected to a 12 V power supply of negligible internal resistance.  
**L** then dissipates its rated power  $P_r$ .

A second lamp, identical to **L**, is now connected in series with **L**.

Determine the percentage of  $P_r$  that is dissipated in this circuit.

**[2 marks]**

percentage = \_\_\_\_\_ %


16



0 3

**Figure 7a** shows the front view of a vertical coil mounted on a circular frame.

**Figure 7b** is a side view showing a section through the frame and coil. A constant direct current in the coil produces magnetic flux represented by the magnetic field lines on this diagram.

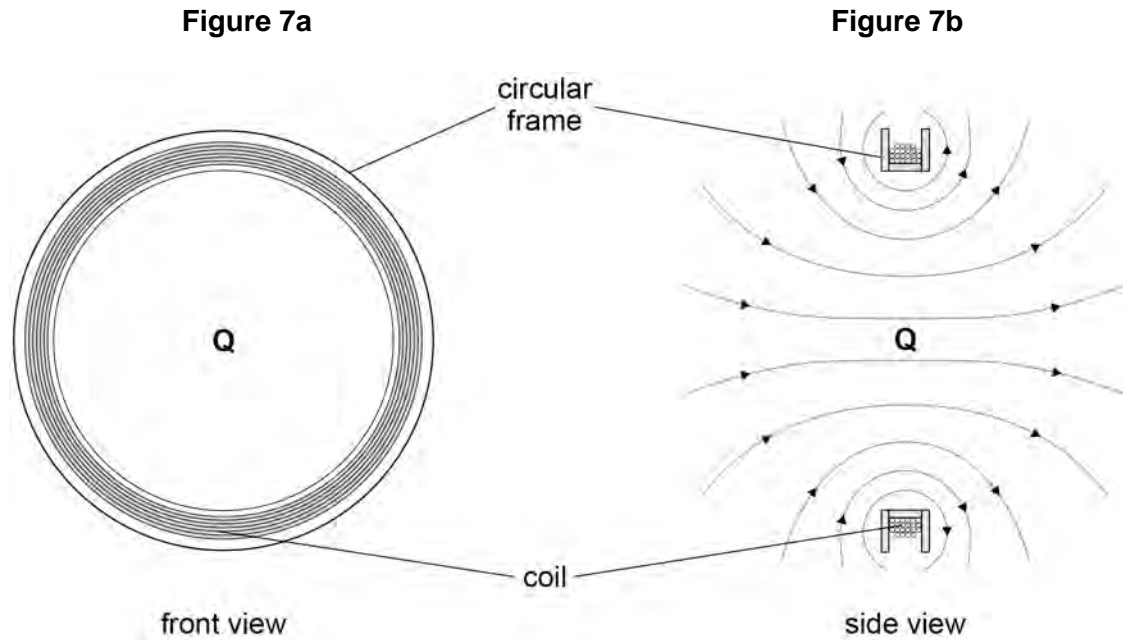

Point **Q** is at the centre of the coil.

A sensor placed at **Q** detects  $B_H$ , the horizontal component of the magnetic flux density.

The effect of the Earth's magnetic field at **Q** is negligible.

0 3 . 1

Discuss whether a search coil is a suitable sensor to detect  $B_H$ .

[2 marks]

---

---

---

---

---

---

---

---

Question 3 continues on the next page


Turn over ►



$B_H$  is measured at **Q** with the coil vertical.

The coil is now rotated about **Q** through  $25^\circ$  as shown in **Figure 8**.  
The current in the coil does not change.

**Figure 8**

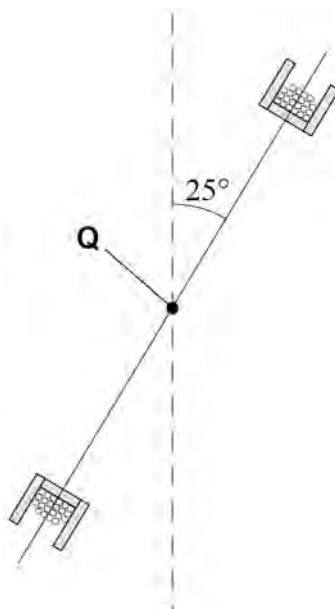

A new measurement of  $B_H$  is made with the coil fixed in this new position.

**0 3 . 2** Determine the percentage change in  $B_H$  produced by this rotation of the coil.  
Show your working.

**[2 marks]**

percentage change = \_\_\_\_\_ %






Do not write  
outside the  
box

0 3 . 3

**Figure 9** shows a protractor being used to measure the angle through which the coil is rotated.

**Figure 9**

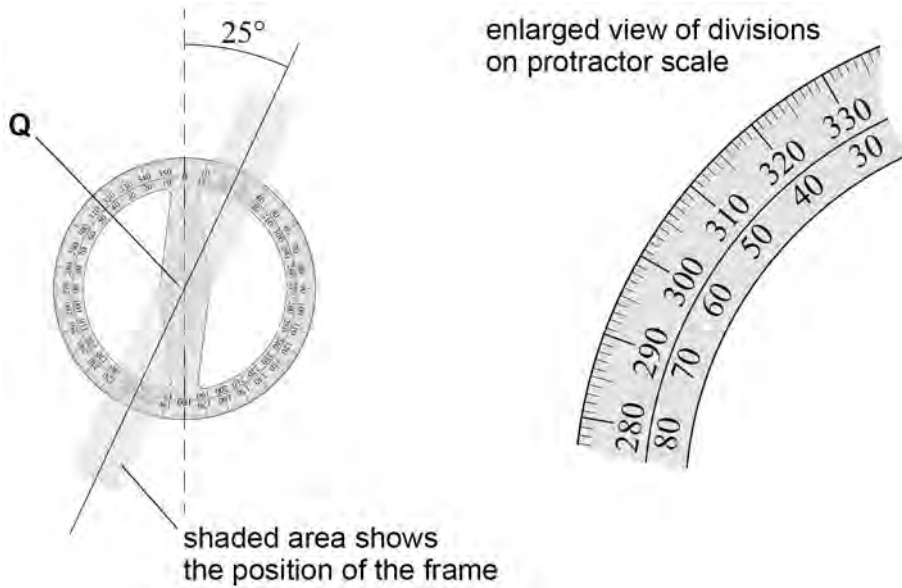

Estimate the percentage uncertainty in this result.  
Justify your answer.

**[3 marks]**

---



---



---



---



---

percentage uncertainty = \_\_\_\_\_ %

**Question 3 continues on the next page**


**Turn over ►**



**Figure 10** shows an arrangement of two vertical coils.  
Four experiments are done using this arrangement.

Do not write  
outside the  
box

**Figure 10**

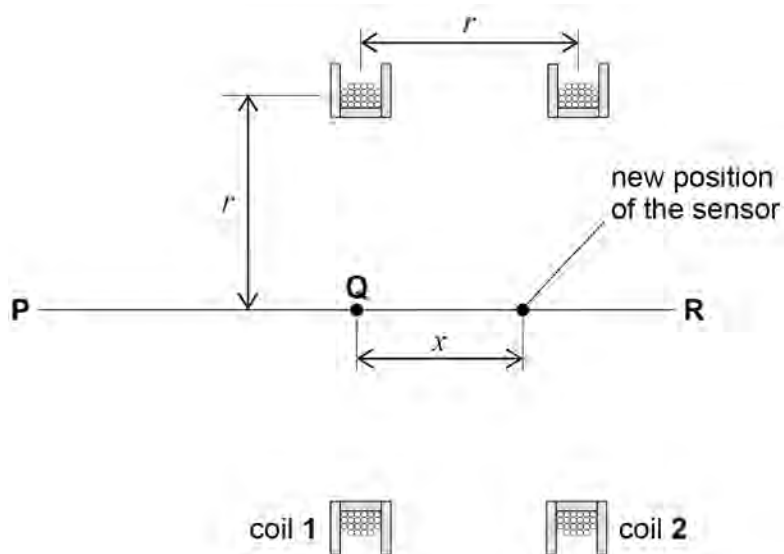

Coil 1 and coil 2 are identical and have a radius  $r$ .  
The coils are separated by a distance  $r$  and have a common axis **PR**.  
**Q** is at the centre of coil 1.

The four different experiments investigate how  $B_H$  varies with  $x$ , the displacement of the sensor from **Q** along **PR**.


In experiment 1, the current in coil 1 is 225 mA and the current in coil 2 is zero.

In experiment 2, the current in coil 1 is zero and the current in coil 2 is 225 mA.



Figure 11 shows the results of experiment 1 and experiment 2.

Figure 11

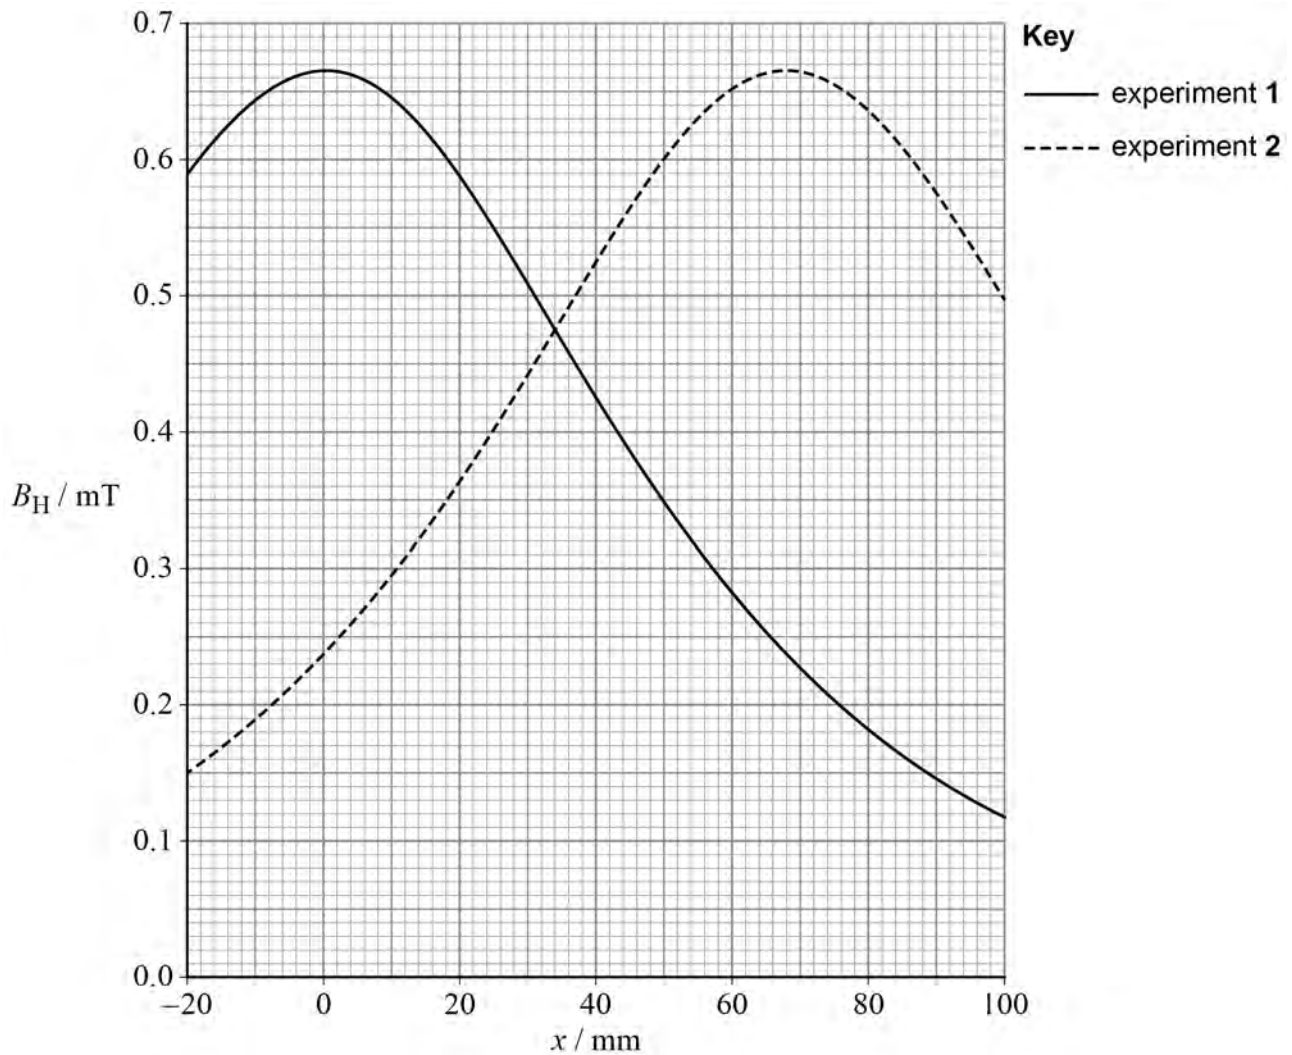

0 3 . 4

During experiment 1,  $B_H$  is measured with the sensor at **Q**.

The sensor is then moved along **PR** until the value of  $B_H$  is halved.

The distance from **Q** to the sensor is  $x_{0.5}$

Determine  $\frac{x_{0.5}}{r}$

[2 marks]

$\frac{x_{0.5}}{r} =$  \_\_\_\_\_

Turn over ►



In experiment **3**, the current in both coils is 225 mA so that the magnetic fields produced by coil **1** and coil **2** are combined.

The resultant  $B_H$  has a constant maximum value in the region between  $x = \frac{r}{4}$  and

$$x = \frac{3r}{4}$$

**0 3 . 5** Deduce, in mT, the value of  $B_H$  in this region.

[2 marks]

$B_H =$  \_\_\_\_\_ mT

**0 3 . 6** State **two** characteristics of the magnetic field lines in this region.

[2 marks]

1 \_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

2 \_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_



03.7


In experiment 4, the current in coil 2 is reversed so that the direction of the magnetic field produced by coil 2 is also reversed.

The magnitudes of the currents in coil 1 and coil 2 are still 225 mA.

Sketch a graph to show how  $B_H$  varies between  $x = 0$  and  $x = r$ .

The  $x$ -axis has been provided for you.

Your graph should include numerical values on your  $B_H$  axis that correspond to  $x = 0$  and  $x = r$ .

**[3 marks]****END OF QUESTIONS**

16



**There are no questions printed on this page**

*Do not write  
outside the  
box*

**DO NOT WRITE ON THIS PAGE  
ANSWER IN THE SPACES PROVIDED**





